


# RFID Surface Read Point

For inventory that doesn't need to be contained within an enclosure or maintained at a certain temperature there's the RFID Surface Read Point. Easily integrate this RFID Read Point into your current workflow to prevent stock-outs and monitor expiry. All that's needed is a level surface and 26 in. x 22 in. of space.

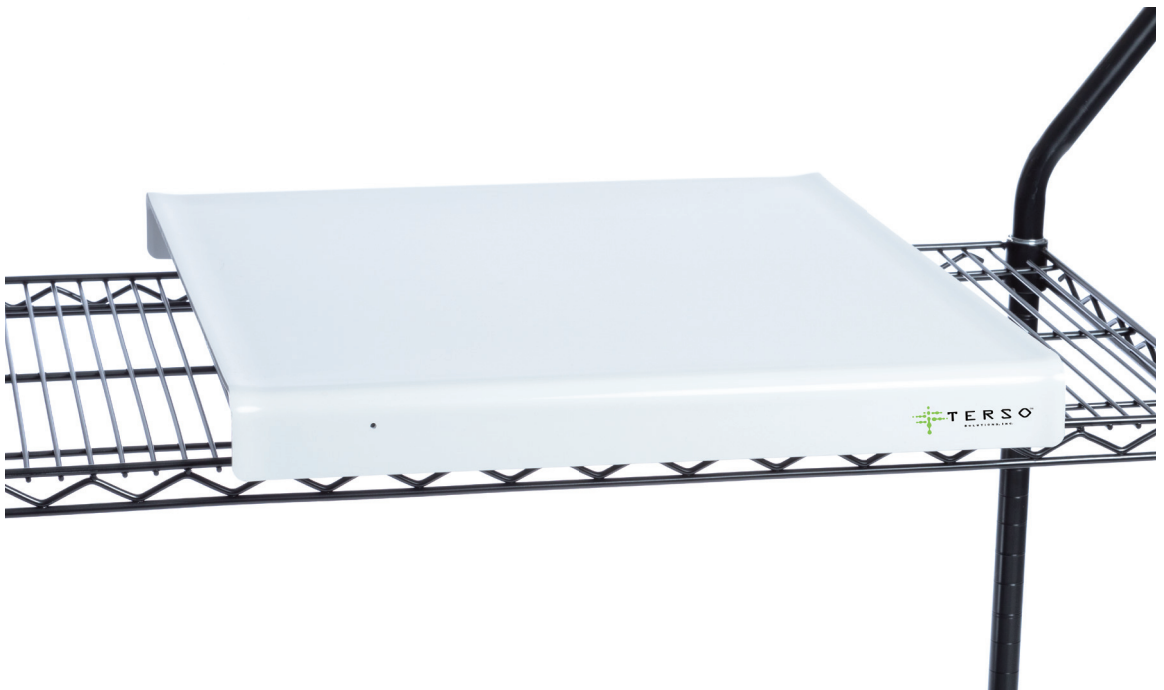

# FEATURES

## AT A GLANCE

Model number	US   EUR TS082
External dimension H x W x D	2.375 in. x 24.8 in. x 21.5 in. 60.325 mm. x 629.92 mm. x 546.1 mm.
Device weight	US 18.0 lbs EUR 8 kg
Maximum inventory weight	US 40.0 lbs EUR 18 kg
Operating temperature range	0 °C to +50.0 °C
Surface material	ABS plastic
Mounting options	Cable ties to secure to a 24.0 in. (610 mm) rack or rubber feet
Communications	Ethernet
RFID read area	Adjustable from ~6.0 in. to 5.0 ft. above surface of device
Electrical power	IEEE 802.3af Power over Ethernet Or 12 VDC power supply
Power consumption	10 W max
RFID power	0.25 W
RAIN RFID frequency	US 902 to 928 MHz EUR 865 to 868 MHz
Certifications	RAIN, SGS, UL, cUL, FCC, CE, RoHS, IP41 Rated, NOM, NYCE



## BENEFITS

- Optimize inventory levels and reduce shrinkage
- Prevent stock-outs; monitor expiry of products
- Receive item variance alerting and reporting\*
- Provide regulatory compliance
- Tailor with your branding
- Integrate with existing inventory platforms

	APPLICATIONS	LOCATION USE
<p>RFID Surface Read Point in action</p> <p><b>WHAT IS IT GOOD FOR?</b></p>	<p><b>Point of use</b> <b>Consumption events</b> <b>Kanban</b></p>	<p><b>Hospitals</b> <b>Labs</b> <b>Dental offices</b> <b>Operating rooms</b> <b>Stockrooms</b> <b>Supply rooms</b> <b>Medical device</b> <b>manufacturers and</b> <b>distributors</b> <b>Consignment inventory</b></p>

\*When connected to Stratosphere or similar inventory management software

\*Specifications subject to change without notice